


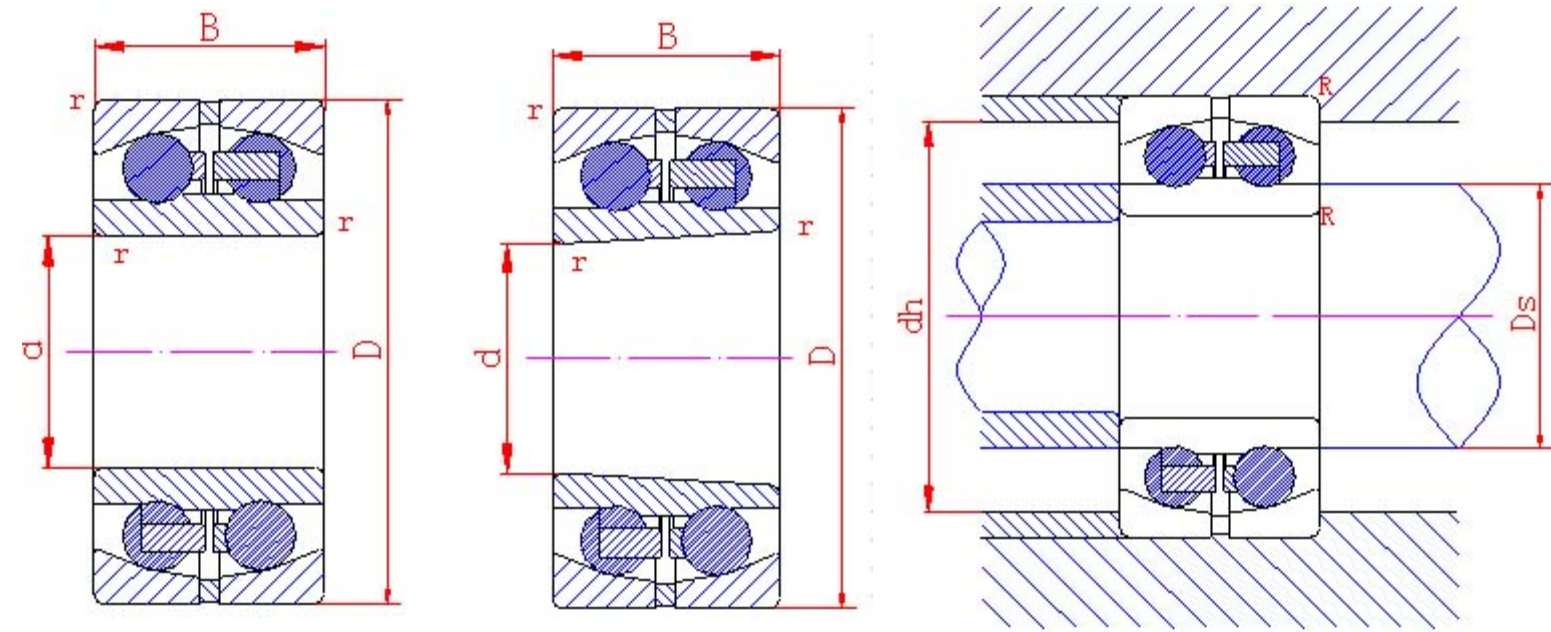

查找结果如下:

基本尺寸				基本额定负荷		极限转速		轴承代号		安装相关尺寸			轴向载荷系数				重量	
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑	圆柱孔	圆锥孔	D _{smin}	dh _{max}	R _{max}	e	Y1	Y2	Y0	圆柱孔	圆锥孔
25	52	15	1	12.1	3.30	13000	16000	1205TN1		30	47	1	0.28	2.2	3.5	2.5	0.137	
25	62	17	1.1	13.8	5.05	9500	12000	1305TN1		31.5	55.5	1	0.28	2.2	3.5	2.5	0.249	
30	62	16	1	15.6	4.70	10000	13000	1206	1206K	35	57	1	0.25	2.5	3.87	2.62	0.228	0.223
30	62	20	1	22.5	4.60	9500	12000	2206	2206K	35	57	1	0.39	1.63	2.53	1.71	0.260	0.254
30	62	20	1	22.5	4.60	9500	12000	2206TN1		35	57	1	0.39	1.63	2.53	1.71	0.242	
30	72	27	1.1	31.0	8.70	8500	10000	2306	2306K	36.5	65.5	1	0.44	1.43	2.22	1.5	0.515	0.515
30	72	27	1.1	31.0	8.70	8500	10000	2306TN1		36.5	65.5	1	0.44	1.43	2.22	1.5	0.494	
35	72	17	1.1	18.1	5.15	9000	11000	1207	1207K	41.5	65.5	1	0.23	2.74	4.24	2.87	0.318	0.312
35	72	17	1.1	18.1	5.15	9000	11000	1207TN1	1207KTN1	41.5	65.5	1	0.23	2.74	4.24	2.87	0.309	0.303
35	72	23	1.1	29.2	6.70	8500	10000	2207	2207K	41.5	65.5	1	0.37	1.69	2.61	1.77	0.604	0.544
35	72	23	1.1	29.2	6.70	8500	10000	2207TN1		41.5	65.5	1	0.37	1.69	2.61	1.77	0.587	
35	80	21	1.5	25.5	7.95	7500	9000	1307	1307K	43	72	1.5	0.25	2.56	3.97	2.69	0.507	0.480
35	80	21	1.5	25.5	7.95	7500	9000	1307TN1	1307KTN	43	72	1.5	0.25	2.56	3.97	2.69	0.486	0.475
35	80	31	1.5	39.0	11.1	7000	8500	2307	2307K	43	72	1.5	0.46	1.36	2.11	1.43	0.675	0.662
35	80	31	1.5	39.0	11.1	7000	8500	2307TN1		43	72	1.5	0.46	1.36	2.11	1.43	0.659	
40	80	18	1.1	19.5	6.55	8500	10000	1208	1208K	46.5	73.5	1	0.22	2.87	4.45	3.01	0.410	0.402
40	80	18	1.1	19.5	6.55	8500	10000	1208TN1	1208KTN1	46.5	73.5	1	0.22	2.87	4.45	3.01	0.402	0.391
40	80	23	1.1	30.5	7.40	7500	9000	2208	2208K	46.5	73.5	1	0.33	1.9	2.94	1.99	0.520	0.520
40	80	23	1.1	30.5	7.40	7500	9000	2208TN1	2208KTN1	46.5	73.5	1	0.33	1.9	2.94	1.99	0.476	0.475

1100	1300	300	6	910	440	130	160	150/1100D1		1123	1277	5.5	0.21	2.99	4.62	3.13	614
------	------	-----	---	-----	-----	-----	-----	------------	--	------	------	-----	------	------	------	------	-----